


## Surface Mount Flat 6 F K R W W N \ Bridge Rectifier



MBF

### PINNING

PIN	DESCRIPTION
1	/ T Vt[P O T g d h
2	/ T Vt[P O T g d h
3	5 [ Z Vt[Anode g h
4	5 [ Z Vt[Cathode g h

### Features

- Low profile package
- Ideal for automated placement
- Ultrafast reverse recovery time
- Low power losses, high efficiency
- Low forward voltage drop
- High surge capability

### Mechanical Date

- **Case:** MBF Molded plastic body over Schottky barrier chips
- **Terminals:** Solder plated, solderable per JESD22-B102
- **Polarity:** Polarity symbols marked on body

### Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.


Parameter	Symbols	. 0 % )	Units
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	100	V
Maximum RMS voltage	V <sub>RMS</sub>	70	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	100	V
Average Rectified Output Current	I <sub>O</sub>	2.0	A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I <sub>FSM</sub>	50	A
Maximum Forward Voltage at @I <sub>F</sub> = 2.0A	V <sub>F</sub>	0.85	V
Maximum DC Reverse Current @T <sub>A</sub> =25 °C at Rated DC Blocking Voltage @T <sub>A</sub> =125 °C	I <sub>R</sub>	0.5 20	mA
: N K X S G R X K Y O Y Z G T I K L X U S P [ T I Z Q Y A T Z U G S H O K T Z V K X R K M		85	/W
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>stg</sub>	-55 ~ +125	°C

Note: 1. Units mounted on P.C.B. with 0.5×0.5"(13×13mm) pads


2. Pulse test:300μs pulse width,1% duty cycle.

## RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)


**Fig.1 Forward Current Derating Curve**

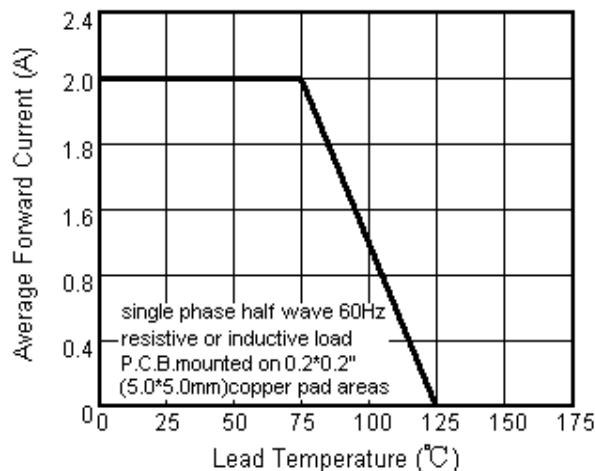


**Fig.2 Maximum Non-Repetitive Peak Forward Surge Current**

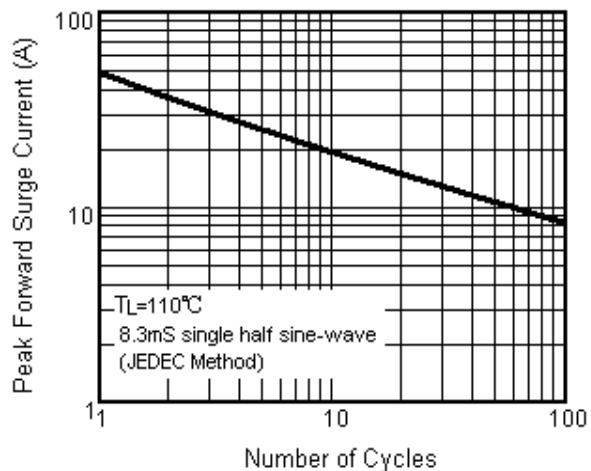


**Fig.3 Typical Instantaneous Forward Characteristics**

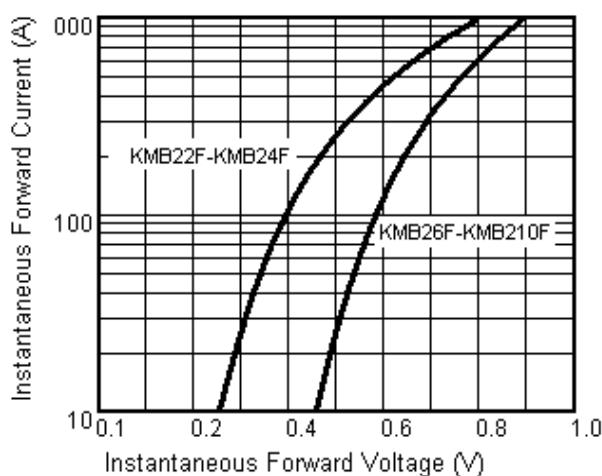

**Fig.4 Typical Reverse Characteristics**

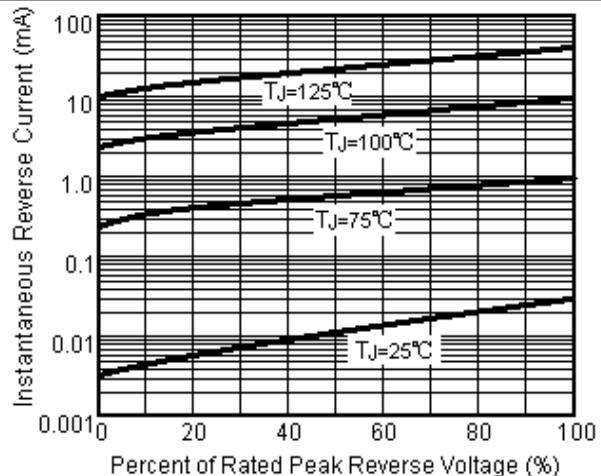

## PACKAGE OUTLINE DIMENSIONS

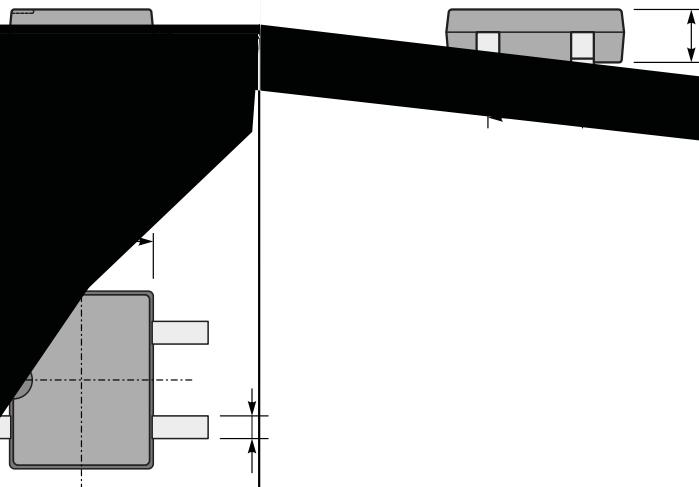

MBF mechanical data

	A	C	D	E	H <sub>E</sub>	d	e	L	L <sub>1</sub>	a
mm	max	1.6	0.22	5.0	4.1	7.0	2.7	0.8		
	min	1.2	0.15	4.5	3.6	6.4	2.3	0.5		
mil	max	63	8.7	197	161	276	106	31		
	min	47	5.9	177	142	252	91	20		

7°