

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRUZDURQWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGH)HLQLVK &R#6OLDQW


Applications

- ‡ '&' &RQYHUWHUV
- ‡ \$&'&\$GDSWRUV
- ‡ 6ZLWFKRZHXSSOLHV
- ‡)UHHZKH'HLRGLJ

Maximum ratings and electrical characteristics (TJ = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LPXPVSHUNYHYURQWDJH		9550		9
0D[LPXPYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRVZDURUUHQW VLQDQHQZDYH VXSHULPBRQDURRSGGLRGH		,)60		\$
2SHUDMXQDQURWRUDJH WDESHUDW		X0H767*	WR	
7\SLFDO WKHUPDO UHVLVWDQFH SHU		GLRQ 10RXQWHG RQ)5	3&f% :	
,QVWDQWDQHRXURQWDJH SHGLRGH	,) \$	7- f&	7<3	0\$;
	,) \$			
		9)		9
,QVWDQWDQHRXURQWDJH UDWHYHYURQWDJH	7- f&	,5		X\$
1RWHV				
3XOVH WHVW 3XOVH ZLGWK GXW\F\FOH				
3XOVH WHVW 3XOVH ZLGWK 0				


3 \$ & . \$ * (287 / , 1 (' , 0 (16 , 2 1 6

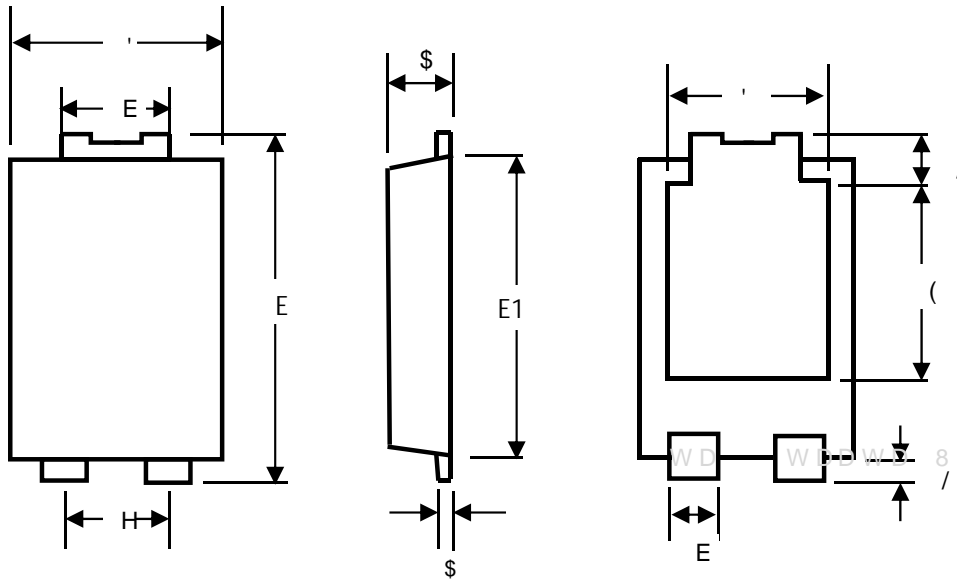


72

81,7

Marking Information




3 URGXFW PRGHO 7 6 315L65SP 5 HIHUUH
WR DV 15L65
3' & LQIRUPDWLRQ

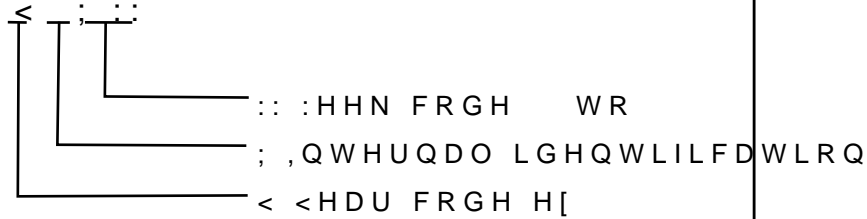


Packaging Information



5HHO 'LPHQVLRQV



,QVLGH %R[



2XWVLGH %R[

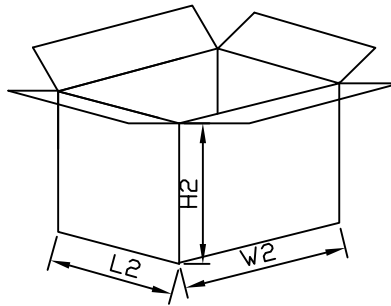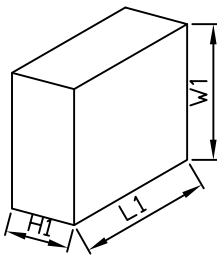

Packaging Information

12	81,7	5HHO'PHQVLRQV	,QVLGH %R[2XWVLGH %R[
6L]H	PP	\$ %	/ : +	/ : +
47<	3&6	6PDOOHVW SDFNDJH	3&6 UHHO	3&6 UHHO
1RWH		7ROHUDQFH PP	PP PP	PP PP