

7 U H Q F K 0 2 6 % D U U L H U 6 F K R W W N \ 5 H

Features

‡ \$ G Y D Q W U H G Q F K W H F K Q R O R U \
 ‡ / R Z R U Z D Y R G W D J H G U R S
 ‡ / R Z R Z I O U V V H V
 ‡ + L J H I L F L H Q F \ R S H U D W L R Q
 ‡ / H D G H H L Q L V K & R P 6 O L D Q W

Applications

‡ ' & ' & & R Q Y H U W H U V
 ‡ \$ & ' & \$ G D S W R U V
 ‡ 6 Z L W F X R Q I S S O L H V
 ‡) U H H Z K H H L Q G Q J

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)

3 D U D P H W H U	6 \ P E R O	/ L P L W	8 Q L W
0 D [L P X P H S H V S H M U N Y Y H Y U R Q W D J H	9 5 5 0		9
0 D [L P X P Y H U D R J H Z D U G U F X E W H I Q W G	,) \$ 9		\$
3 H D N I R U Z D U F S U U H Q W V L Q D O H Q Z D Y H V X S H U L P S Q M H V G R S E G L R G H	,) 6 0	2	\$
2 S H U D M X Q E D Q L Q W R U D J H W H P S H U D W X O H 0 6 7 C J H 5 W R			
7 \ S L F W D C H U P D O U S H V U L V O H D Q F H ' 2 \$ '	5 \$ - & f & \$ a	2	f & :

,pQ ccS" ,1 &RtRqG ccS" ,1 &Rp•Á1 ccS" ,7 2H' c 6

U É (Ü Ø Ä J F i æ , @ v W R G p P h 2 € € € P 7 5'

7- f &

X \$

1 R W H V



3 X O V H W H V V S X O V H Z L G W K G X W \ F \ F O H

3 X O V H W H V W 3 X O P V H Z L G W K 0


RATINGS AND CHARACTERISTICS CURVES

7\$

f & X Q O H V Q R W K B U Z L V H

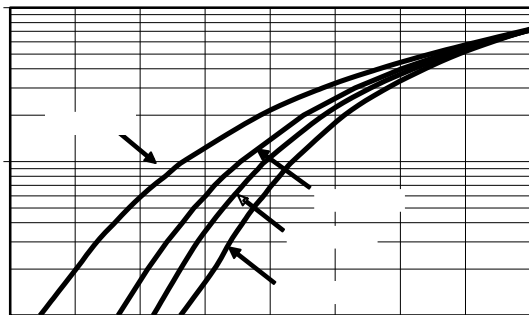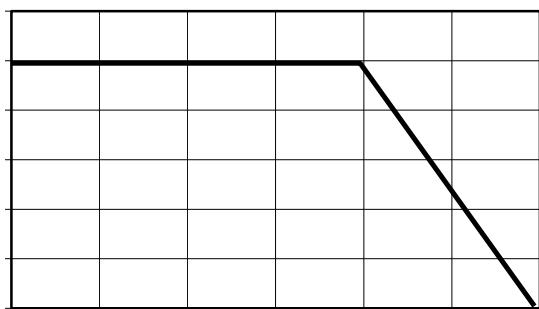


PACKAGE OUTLINE DIMENSIONS

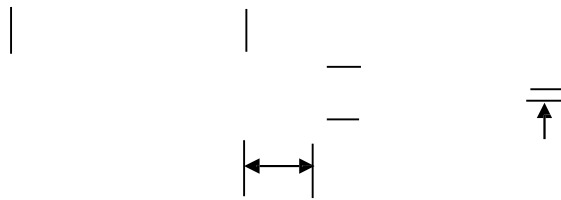

0DUNLQJ ,QIRUPDWLRQ


&DWKRGH



73URGXFW PRGHO 76\$ /

83' & LQIRUPDWLRQ

< ; ::

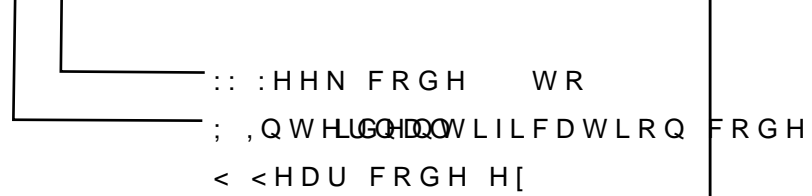


\$QRGH

3DFNDJLQJ ,QIRUPDWLRQ

,QVLGH %R[

2XWVLGH %R[

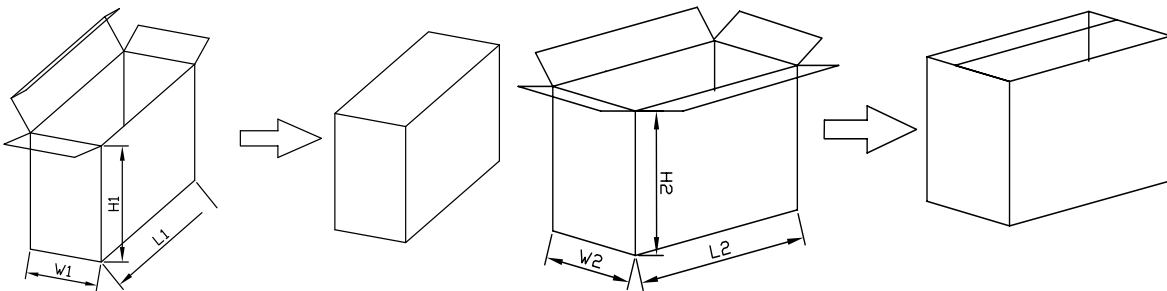

3DFNDJLQJ ,QIRUPDWLRQ

12	81,7	,QVLGH %R[2XWVLGH %R[
6L]H	PP	/	:	+	/	:	+
	3&6	6PDOSDFWDJH3&6FDUWRQ			3&6 FDUVERQHLWRWDO		
1RW	7ROHUDQFPP	PP" PP		PP" PP			