


Features

- Advanced trench technology
- Low forward voltage drop
- Low power losses
- High efficiency operation
- Lead Free Finish, RoHS Compliant


A •3 c V $\text{\textcircled{D}}$ f>X3¥f4 F H G

‡




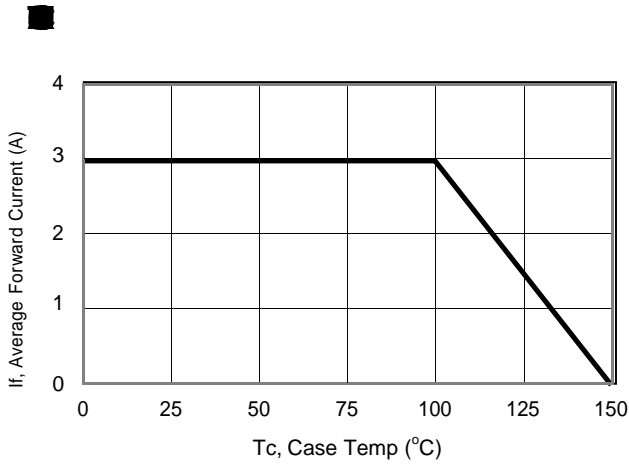


Current Derating, Case

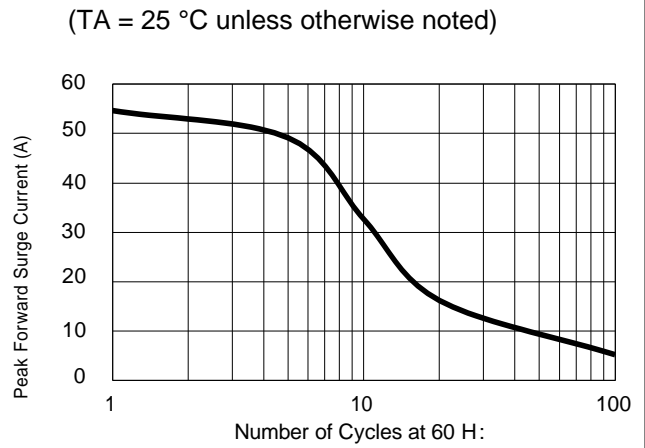


Maximum Repetitive Surge Current

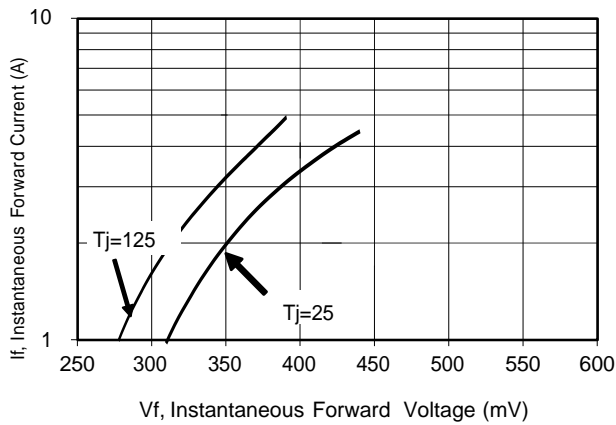

Typical Forward Voltage

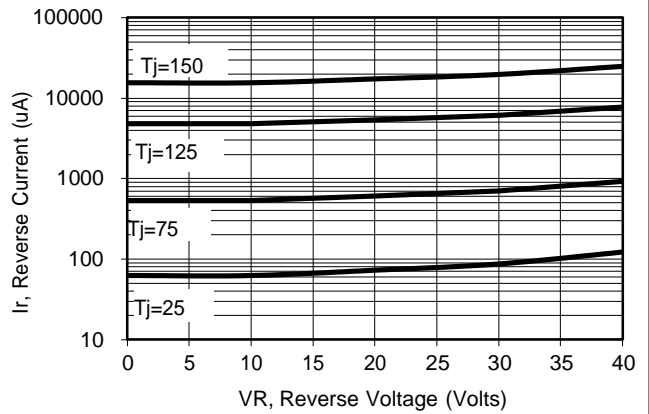


Typical Reverse Current

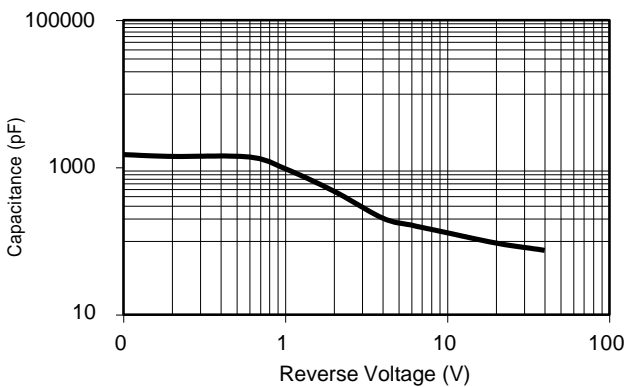


Typical Junction Capacitance

PACKAGE OUTLINE DIMENSIONS

SMAF

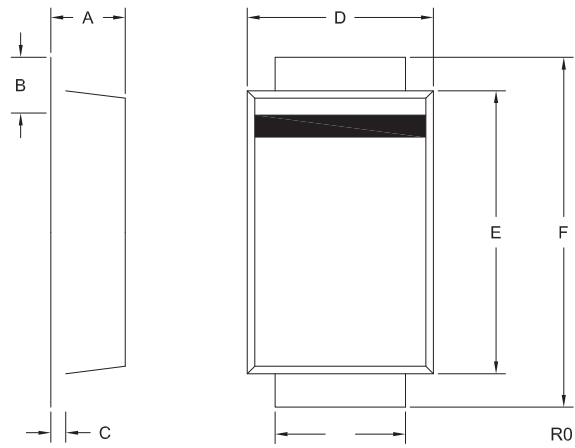

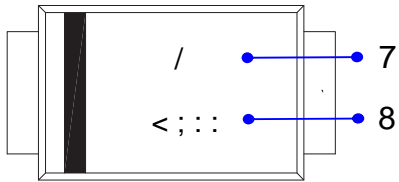

①Product model : TSP3L40AF is abbreviated to 3L40

②PDC information

Y X WW

WW:Week code(01 to 53)

X:Internal identification code

Y:Year code(ex:0=2020)

3 D F N D J L Q J , Q I R U P D W L R Q

1.Reel Dimensions

