

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD

76\$ 9



Cathode Anode

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRZURGRWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGHHLQLVK &R#6OLDQW

Applications

- ‡ '&' &RQYHUWHUV
- ‡ \$&'&GDSWRUV
- ‡ 6ZLWFKRZHXSSOLHV
- ‡ )UHHZKHHLRGRJ

Maximum ratings and electrical characteristics (T<sub>J</sub> = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LPHSHVSHUNYHYURQWDJH		9550		9
0D[LPHYHURJHZDUG UFKJWHIQWG		,) \$9		\$
3HDN IRVZDUEBUHQW VLQDQHQZDYH VXSHULP&QDCHRS&GLRGH		,) 60		\$
2SHUDMXLQDQGRWRUDJH WDESHUDW		X0H 767	WR	f &
7\SLFDO WIKWLPVDOFH		'2 \$'	5\$-&	f & :
,QVWDQWDQHRROWRUJZDUG SHGLRGH	,) \$	7- f &	7 < 3	9
	,) \$	7- f &	0\$;	
	,) \$	7- f &		
	,) \$	7- f &		
,QVWDQWDQHRXUUSHQWRCWH UDWHYHYURQWDJH		7- f &	,5	X\$
		7- f &		P\$

1RWHV

3XOVH WHVVSXOVH ZLGWK GXW\F\FOH


3XOVH WHVW 3XOPWH ZLGWK 0

RATINGS AND CHARACTERISTICS CURVES

7\$


f & XQOHVQRWKBUZLVH

, I \$ Y H U D R H J Z D S X G J U H \$ Q W

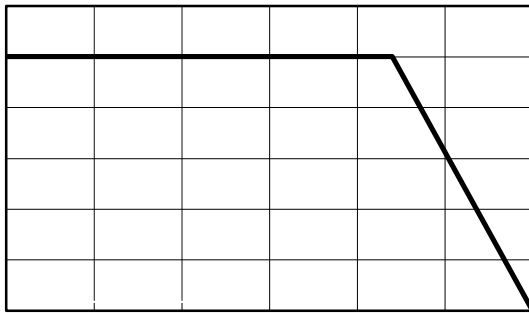


7F & DVH 7&HPS

? ? ?

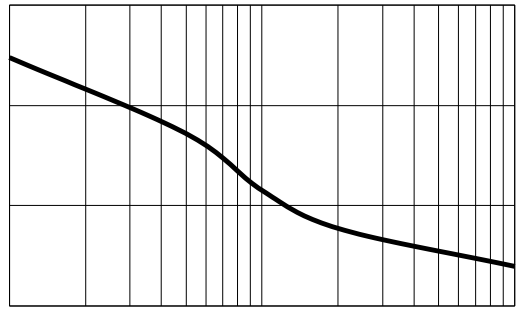

? P ? ?


, I , Q V W D Q W D R Q H Z B X X G J U H \$ Q W

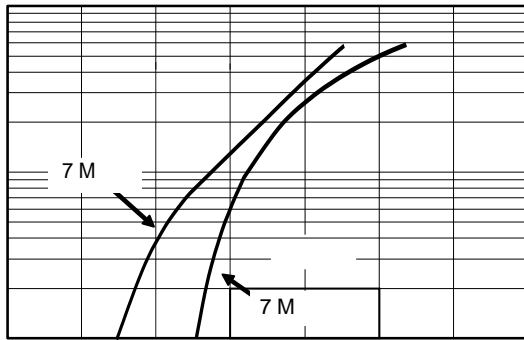

, U5 H Y H U & X H J U H K \$ W


91 , QVWDQWDQHRXV )RUZDUG 9ROWDJH P9

? ? **CR** ?

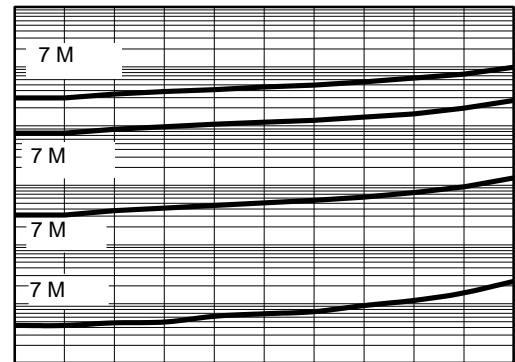

95 5HYHUVH 9ROWDJH 9ROWV


P ?

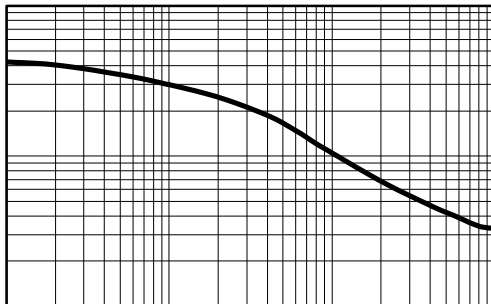

? ?

**PACKAGE OUTLINE DIMENSIONS**

**DO-201AD**

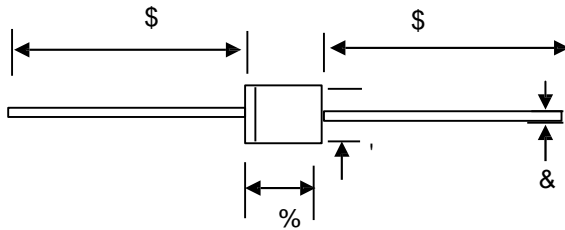


'2 \$' PHFKD QLFWD

81,7		\$	%		'
PP	PD[			4	
	PLQ			1	
PLO	PD[				
	PLQ				

0DUNLQJ ,QIRUPDWLRQ


&DWKRGH




\$QRGH

73URGXFW PRGHO

3'& LQIRUPDWLRQ

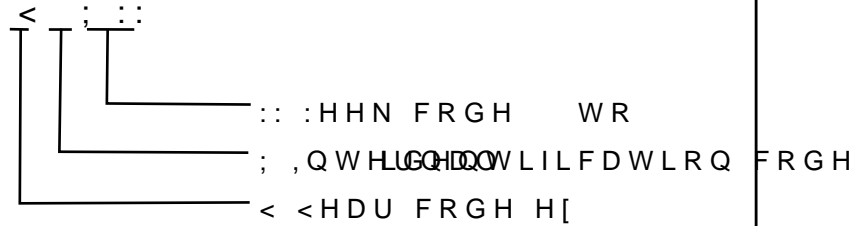

3DFNDJLQJ ,QIRUPDWLRQ

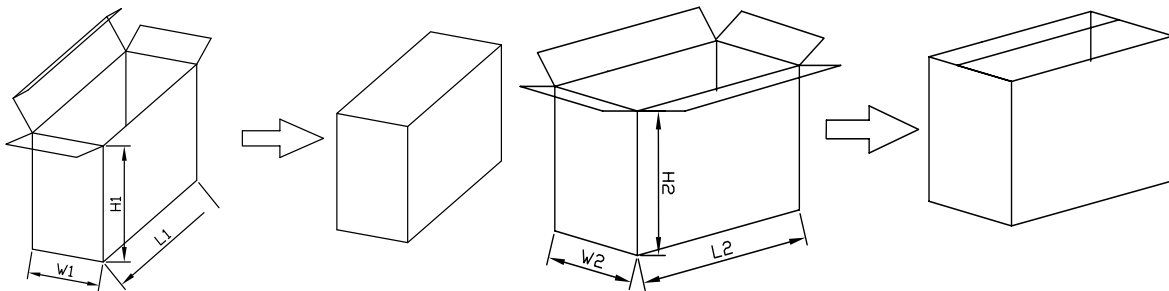

12	81,7	,QVLRGH[			2XWVLGH %R[		
6L]H	PP	/	:	+	/	:	+
47<	3&6	6PDO SDVWDJH 3&6 FDUWRQ			3&6 FDUWRQ HWRWDO		
1RW	7ROHUDQFH	PP" PP		PP" PP	PP" PP		