




TO-220AB
TSR10L60CT




ITO-220AB
TSR10L60CTF

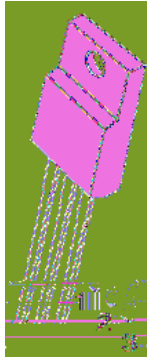


Features


- ‡ \$GYDQWFHGGFK WHFKQRORJ\
- ‡ /RZRUZDYGWDJH GURS
- ‡ /RZRZDQVVHV
- ‡ +LJKILFLHQF\ RSHUDWLRO
- ‡ /HDGH)HLQLVK &R#6OLDQW

RATINGS AND CHARACTERISTICS CURVES 7\$ f & XQOHVQRWKBUZLVH

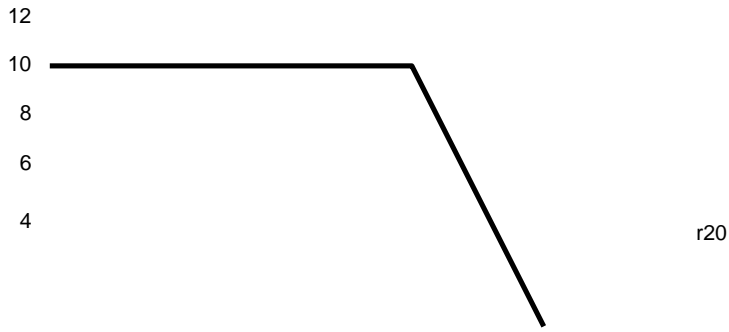


PACKAGE OUTLINE DIMENSIONS

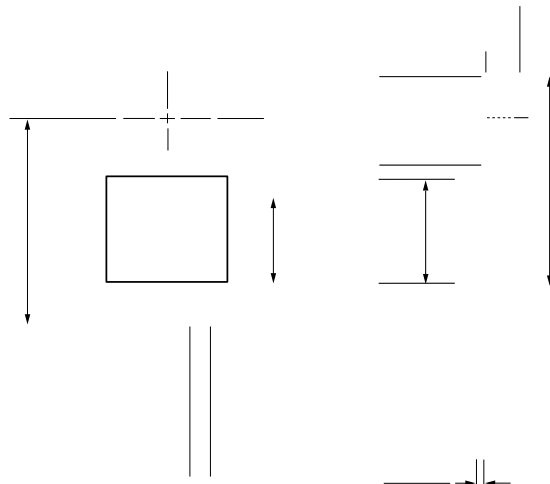

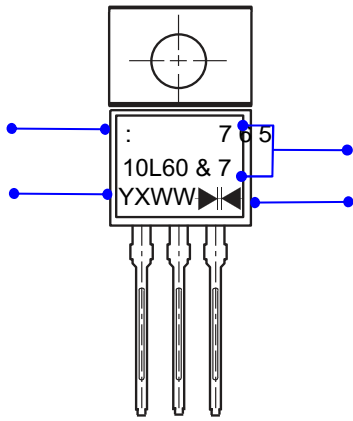


W : Company's trademark
 3 U R G X F W T S R 1 0 L 6 0 C T or TSR10L60CTF
 3 ' & L Q I R U P D W L R Q

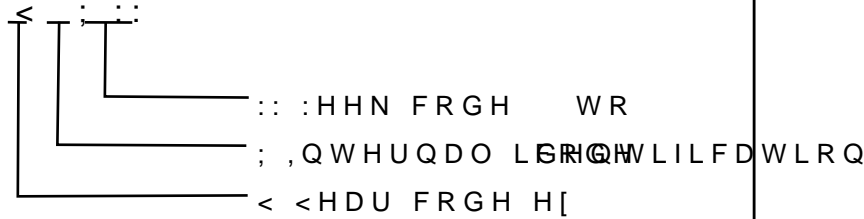

Double wafer

7 X E H ' L P H Q V L R Q V

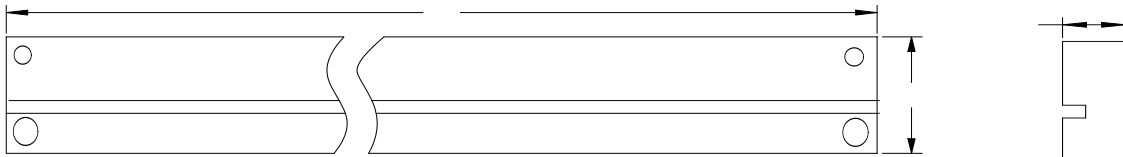

, Q V L G H % R [

2 X W V L G H % R [

| 1 2 | 8 1 , | 7 X E H ' L P H Q V L R | | | , Q V L G H [| | | 2 X W V L G H % R | | |
|---------|---------------------------|-------------------------|---|-----------|--|----|-----------|-------------------------------|----|----|
| 6 1 H | P P | \$ | % | & | / | : | + | / | : | + |
| | | 5 | 7 | 33 | 570 | 46 | 150 | 59 | 26 | 18 |
| 4 7 < | 3 & 6 | 3 & 6 7 X E H | | | 6 P D O C S D F W D J H 3 & 6 2 W X E R W D O | | | 3 & 6 F D U E R G L W R W D O | | |
| 1 R W H | 7 R O H U D Q F P P " P P | | | P P " P P | | | P P " P P | | | |