

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD
TSA 3



Cathode Anode

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRUZDURQWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGH)HLQLVK &R#6OLDQW

Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & GDSWRUV
- ‡ 6ZLWFKRZHXSSOLHV
- ‡)UHHZKH'HLRQJ

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)

| 3DUDPHWHU | | 6\PERO | /LPLW | 8QLW |
|--|--------|----------|-------|-------|
| 0D[LXPXPHSHVSHUNYHYURQWDJH | | 9550 | | 9 |
| 0D[LXPYPYHURJHZDUG UFXEWHIQWG | | ,) \$9 | | \$ |
| 3HDN IRUZDURUHQW VLQDQHQZDYH VXSHULP&QDURHSHGLRGH | | ,) 60 | | \$ |
| 2SHUDMXQDQWRUDJH WHPSHUDW | | X0H767°C | JH WR | f & |
| 7\SLFQCHUPDO USHVULVQHDQFH | | '2 \$' | 5\$-& | f & : |
| ,QVWDQWDQHRRQWRUJZDUG SHGLRGH | ,) \$ | 7- f & | 7 < 3 | 0\$; |
| | ,) \$ | 7- f & | | |
| | ,) \$ | 7- f & | | |
| | ,) \$ | 7- f & | | |
| ,QVWDQWDQHRXUUSHQWRUJ UDWHYHYURQWDJH | 7- f & | ,5 | | X\$ |
| | 7- f & | | | P\$ |




1RWHV

3XOVH WHVVSXOVH ZLGWK GXW\F\FOH

3XOVH WHVW 3XOPH ZLGWK 0


RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted) 5 0

, Temp (

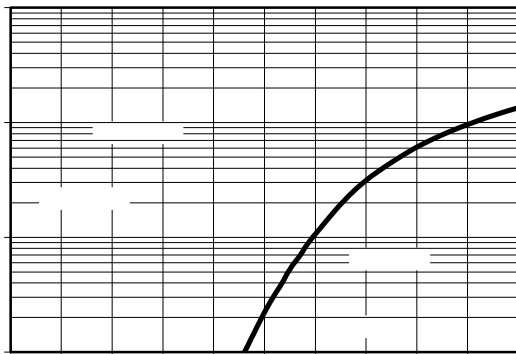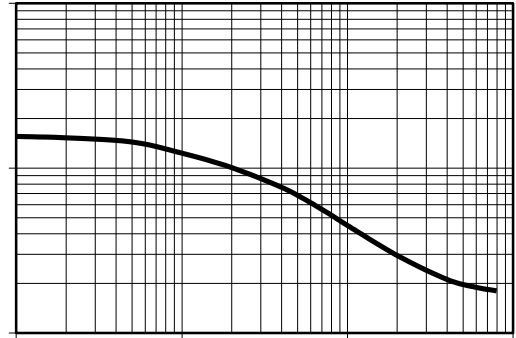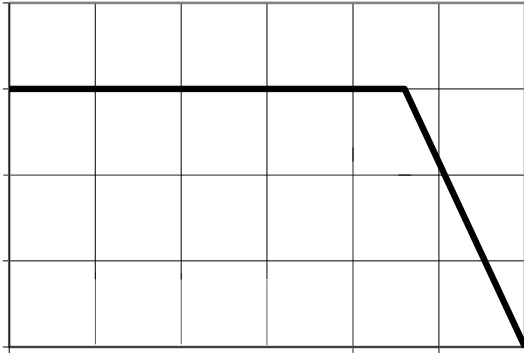

PACKAGE OUTLINE DIMENSIONS


DO-201AD

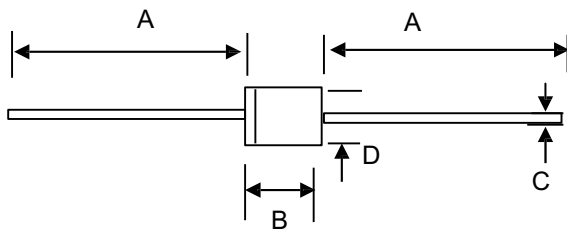

DO-201AD mechanical data


| UNIT | | A | B | C | D |
|------|-----|---------|--------|-----|--------|
| mm | max | 26.5 | 9.5 | 1.4 | 5.3 |
| | min | 24.5 | 7.3 | 1.1 | 4.8 |
| mil | max | 1043.30 | 374.01 | 5.1 | 208.67 |
| | min | 946.57 | 287.40 | | 188.97 |

Marking Information

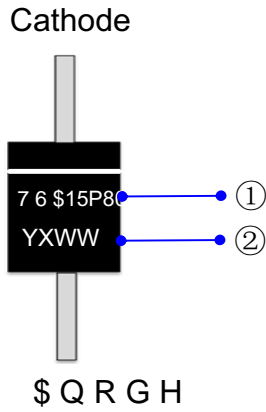



① Product model : TSA15P80

② PDC information


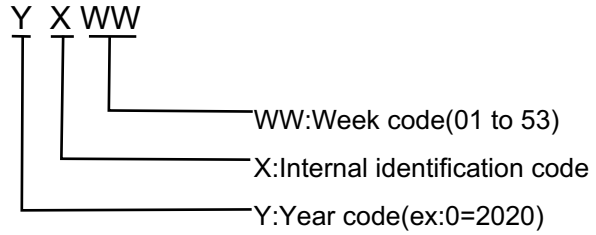


Packaging Information

1. Inside Box

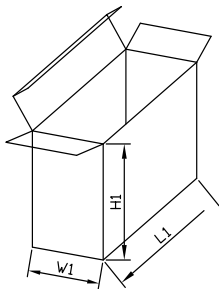

2. Outside Box



Packaging Information

| NO | UNIT | Inside Box | | | Outside Box | | |
|------|-----------|---------------------------------|----|----------------|------------------------------------|-----|-----|
| | | L1 | W1 | H1 | L2 | W2 | H2 |
| Size | mm | 255 | 75 | 14 | 4 | 280 | 320 |
| QTY | PCS | Smallest package,1000PCS/carton | | | 10,000PCS/carton,10 boxes in total | | |
| Note | Tolerance | ≤20mm,±3mm; | | 21-100mm,±5mm; | 101-500mm,±10mm | | |