


7UHQFK 026 %DUULHU 6FKRWWN\ 5H

763 / 63

72



Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRUZDURGDWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJHILFLHQF\ RSHUDWLRQ
- ‡ /HDGHHLQLVK &RPSOLDQW

Applications

- ‡ ' & ' & RQYHUWHUV
- ‡ \$ & ' & GDSWRUV
- ‡ 6ZLWFKRZDSSOLHV
- ‡)UHHZKHHLRGLJ

Maximum ratings and electrical characteristics (TJ = 25°C unless otherwise noted)


3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LXPXPHSHVSHUNYYHYURQHW DJH		9550		9
0D[LXPYHURDJH ZDUG UFKXWHHQWG		,) \$9		\$
3HDN IRVZDURUUHQW VLQRDHLQZDYH VXSHULPSRQDURSHGLRGH		,) 60	0	\$
2SHUDMXQRDURQRWRUDJH WDRSHUDW		X0H767*	5 WR	f &
7\SLFDO WKHUPDO UHVLVWDQFH SHU		GLSRGH	ORXQWHG RQ)5	3 & % :
,QVWDQWDQHRRQRWRUDUG SHGLRGH	,) \$	7- f &	7 < 3	9
	,) \$	7- f &	0\$;	
	,) \$	7- f &		
	,) \$	7- f &		
,QVWDQWDQHRXUUSHQRDURWH UDWHYHYURQHW DJH		7- f &		X \$
		7- f &		P \$

1RWHV

3XOVH WHVSRXOVH ZLGWK GXW\F\FOH


3XOVH WHVW 3XOPWH ZLGWK 0

RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

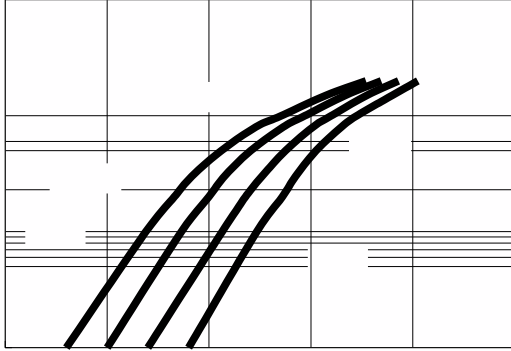

PACKAGE OUTLINE DIMENSIONS


TO-277

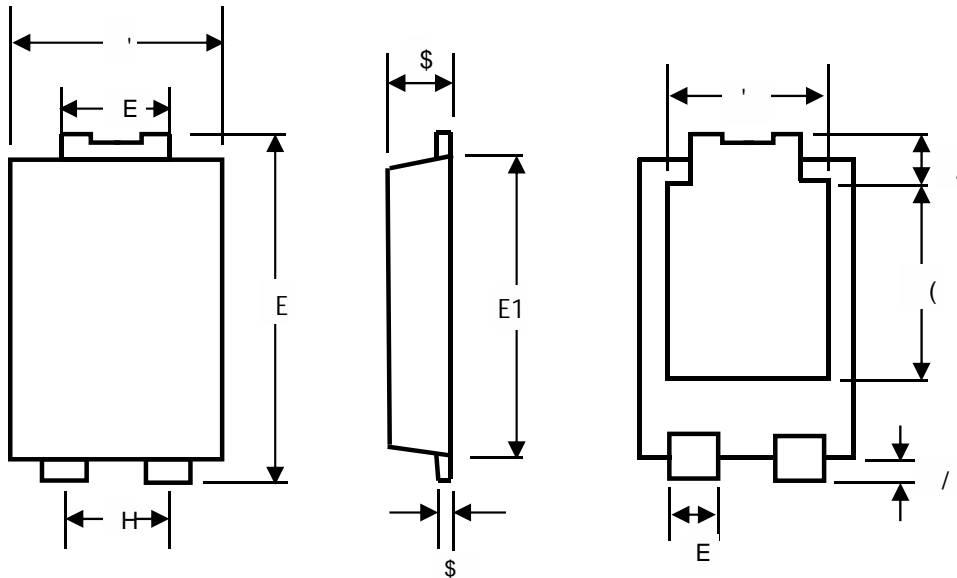

TO-277 Mechanical Data

81,7		\$	\$	E	E	'	'	(((/	/
PP	PD[
	PLQ											
PLO	PD[
	PLQ											

7 2 Suggested Pad Layout

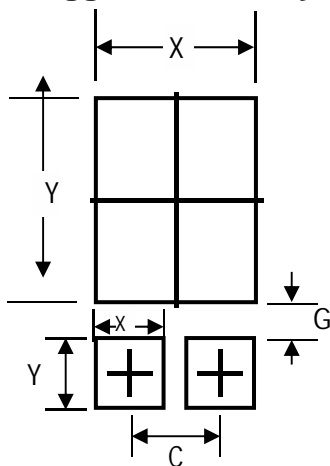

81,7		&	*	;	;		
PP	PLQ						
PLO	PLQ						

Marking Information

